SeSys

Networked Vision Solutions

ATEX Housed Observational Camera System for Hazardous Area Remote Monitoring

- Ideal system for process monitoring
- Zone 1 certified/IP66/optional IP67
- Hazardous area risk reduction
- Observation in inaccessible areas
- High resolution IP Camera (Megapixel)
- Colour camera with zoom facilities
- Remote control of all camera settings
- Compact unit, easy to install
- Utilises power over Ethernet for ease of installation and operations
- Built in event recorder with pixel motion detector for event capturing and recording.

Models Available

- CCTV Digital IP Camera – Dual lens
- Day/Night or Wide angle/telephoto
- Built in lighting unit using LED technology
- 12 volt operation OR 110V/230 volt AC
- External trigger input
- GSM/GPRS/3G/ADSL operation
- Web browser based software recording up to 30 fps/view on demand

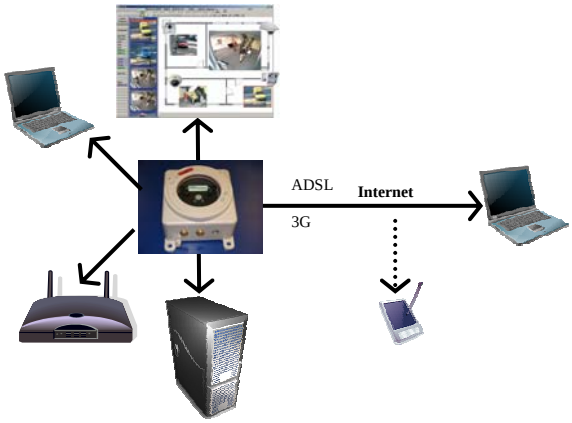

No software installation is required as the camera manages all the recording and playback functions internally, also providing simultaneous display of live images while another user views recorded video.

The integrated camera computer stores the data on a ring buffer on any Microsoft or Linux PC/Server.

Manufacturer of the Award Winning Torch Camera

1 Rotherbrook Court
Bedford Road
Petersfield
GU32 3QG, UK

SeSys Limited

Tel: +44 (0)1730 230530
Fax: +44 (0)1730 262333
Email: info@sesys.co.uk
www.sesys.co.uk

ATEX HOUSED OBSERVATIONAL CAMERA SYSTEM FOR HAZARDOUS AREA REMOTE MONITORING

SPECIFICATION

Certification to European ATEX Directive 94/9/EC Equipment and protective systems intended for use in potentially explosive atmospheres.

Product No: ATEX IP Camera Ex'd Enclosures and is in conformity with the following standards or other nominative documents:

EN50014:1998 Electrical apparatus for potentially explosive atmospheres. General requirements

EN50018:2000 Electrical apparatus for potentially explosive atmospheres – flameproof enclosure'd'

BSEN60079-14:2003 Electrical apparatus for explosive gas atmospheres Electrical installations in hazardous areas (other than mines)

Conformity has been demonstrated with reference to the following documentation:

- EC type examination certificate: CESI 01 ATEX 036
- Quality assurance notification: SIRA 05 ATEX M330

TECHNICAL DETAILS

ENCLOSURE		CAMERA – TYPICAL CONFIGURATION	
Material:	Grade LM6 Cast Alloy	Resolution:	x2 MEGA (1280x960) colour
Approx dimensions:	230h x 230w x 154d	Frame Rate:	30fps VGA/30fps CIF/
Approx weight:	5.8kg		10fps MEGA
Finish:	RAL 7035 Epoxy powder Coat	Sensitivity:	1 lux (t=1/60sec)/
Temperature:	-20°C to +55°C		0.05 lux t=1/1sec)
Voltage:	12volt/110/240V AC	Lenses:	Wide angle (43mm, f2.0)
			Tele (135mm, f2.5)

Also available: ATEX housed with power supply and power over Ethernet injector with media converter for fibre-optic connection.

1 Rotherbrook Court
Bedford Road
Petersfield
GU32 3QG, UK

SeSys Limited

Tel: +44 (0)1730 230530
Fax: +44 (0)1730 262333
Email: info@sesys.co.uk
www.sesys.co.uk